XS-HF58

5¼″ 2-Way Component Sets

- 150 W Max Input Power
- 5¼″ Magnesium Alloy Woofer Cone
- 1″ Magnesium Alloy Dome Tweeter
- High Compliance Rubber Surround
- 12 dB/Octave Crossover Network

Specifications

Speaker	Separate Type, 2-way
	XS-HF58: Woofer 13 cm (5¼ in.), Cone Type (magnesium diaphragm)
	XS-HF78: Woofer 16 cm (6½ in.), Cone Type (magnesium diaphragm)
	Tweeter 2.5 cm (1 in.), Hard Dome Type
Maximum Input Power	**XS-HF58:** 150 watts **XS-HF78:** 170 watts
Rated Input Power	**XS-HF58:** 40 watts **XS-HF78:** 45 watts
Impedance	4 ohms
Sensitivity	**XS-HF58:** 87 dB/W/m **XS-HF78:** 88 dB/W/m
Frequency Response	**XS-HF58:** 45-25,000 Hz **XS-HF78:** 35-25,000 Hz
Crossover Frequency	Woofer: 5,000 Hz, -12 dB/oct Tweeter: 5,000 Hz, -12 dB/oct
Weight (per speaker)	**XS-HF58:** Approx. 1 kg (2 lb. 3 oz.) **XS-HF78:** Approx. 1.35 kg (3 lb.) Tweeter: Approx. 70 g (2.5 oz.) Passive Crossover Network: Approx. 150g (5.3 oz.)

XS-HF78

6½″ 2-Way Component Sets

- 170 W Max Input Power
- 6½″ Magnesium Woofer Cone
- 1″ Magnesium Dome Tweeter
- High Compliance Rubber Surround
- 12 dB/Octave Crossover Network

XS-HF58 Dimensions

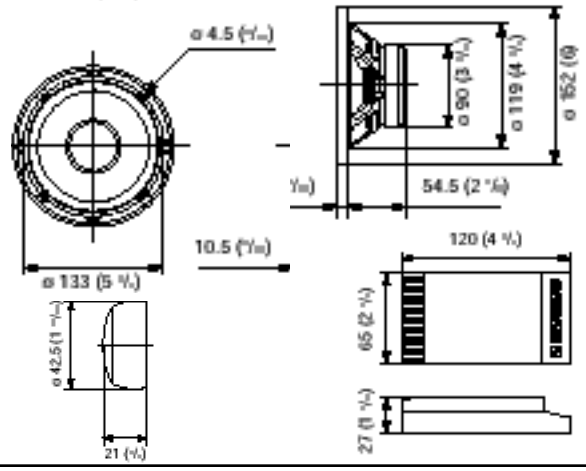

XS-HF78 Dimensions

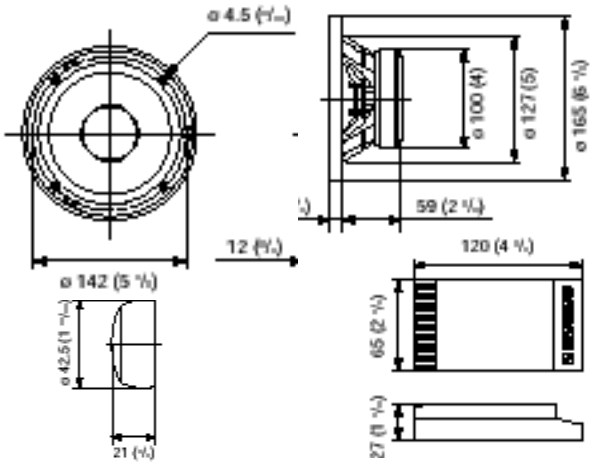

Design and specifications subject to change without notice.